



(11) Publication number : **0 551 961 A1**

(12)

EUROPEAN PATENT APPLICATION

(21) Application number : **93200115.9**

(51) Int. Cl.⁵ : **E06B 5/16, E06B 3/46**

(22) Date of filing : **18.01.93**

(30) Priority : **17.01.92 NL 9200080**

(43) Date of publication of application :
21.07.93 Bulletin 93/29

(84) Designated Contracting States :
BE DE ES FR GB NL

(71) Applicant : **Markus Hermetische Deuren B.V.**
Griendstraat 11
NL-2921 LA Krimpen aan den IJssel (NL)

(72) Inventor : **Wacker, Johannes**
Raadhuislaan 1
NL-2264 BK Leidschendam (NL)

(74) Representative : **Lips, Hendrik Jan George, Ir.**
et al
HAAGSCH OCTROOIBUREAU Breitnerlaan
146
NL-2596 HG Den Haag (NL)

(54) **Fire-resistant sliding door construction.**

(57) Sliding door construction, comprising a door (1) being provided with at least two traversing wheels (5) at the top edge thereof, that are supported by a guide rail (31), such that on closing off an opening (28) in a wall (27), the door will move towards the wall and the floor (29). Sealing profiles (10) of flexible material have been mounted to the door. At least one hook-shaped element (25) has been mounted to the top edge of the door (1), which in closed condition of the door will be in engagement with a hook-shaped element (26) mounted to the wall. The hook-shaped elements (25, 26) are made of steel. Along the edges facing the wall (27) and the floor (29) the door (1) has been provided with strips (21) of a material that will foam on heating.

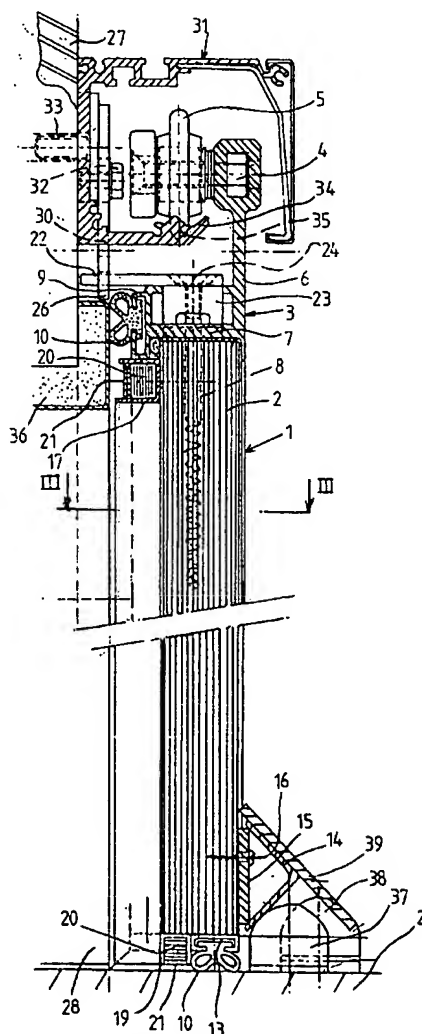


FIG. 1

EP 0 551 961 A1